


21.5" hand sanitizer LCD digital signage

We know how mobilized you are to keep your business going.
In this context related to Coronavirus, we offer this new solution.




21.5" hand sanitizer LCD digital signage

Dimension

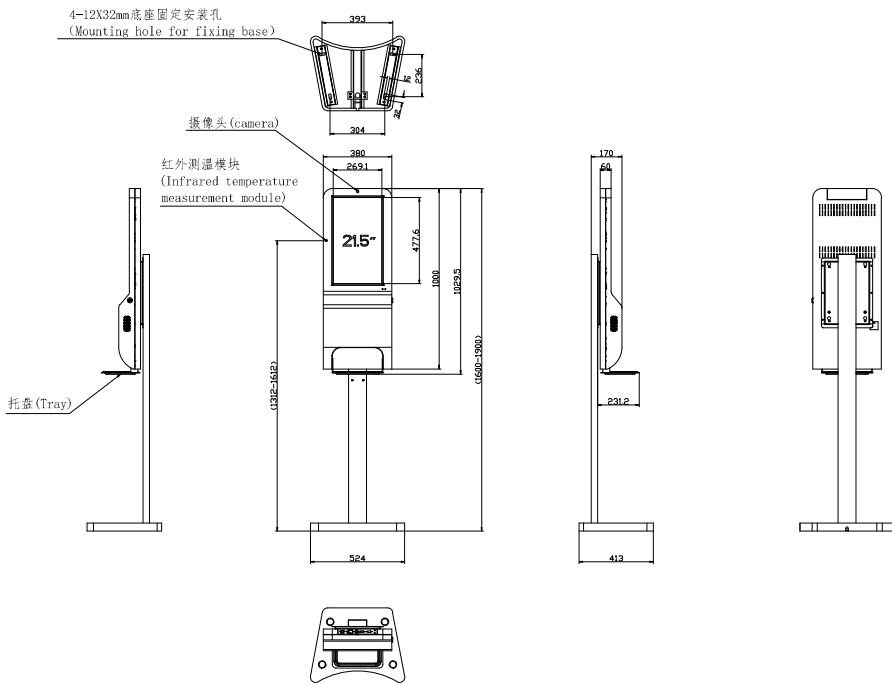


Easy Filling

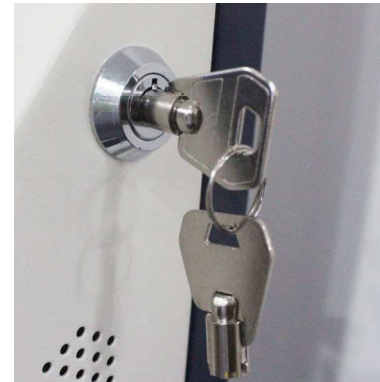

Open the back cover



Tank

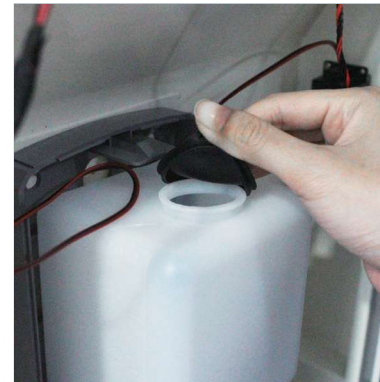

Remove the plug



Fill with hydroalcoholic gel



21.5" hand sanitizer LCD digital signage

Technical sheet



Consumption: 60 W
Weight: 26 kg



Consumption: 60 W
Weight: 38 kg

Input ports	
USB 2.0	x2
HDMI output	x1
SD	x1 (Micro SD)
RJ45	X1
3G/4G SIM slot(optional)	x1
Power supply	
Power input	AC 100-240V
Connectivity	
LAN	10/100M RJ45 port
WiFi	2.4GHz wifi (standard), 5GHz wifi(optional)
3G/4G cellular network(Optional)	WCDMA/TD-LTE/FDD-LTE
General information	
Operation system	Android 6/7
Processor	4 core Cortex-A53
RAM	DDR3 1GB,2GB(optional)
ROM	eMMC flash 8GB,16GB/32GB/64GB(Optional)
Media playing	
Support video format	AVI (H.264、 DIVX、 DIVX、 XVID) , rm , rmvb , MKV (H.264、 DIVX、 DIVX、 XVID) , WMV , MOV , MP4 (.H.264、 MPEG、 DIVX、 XVID) , DAT (VCD format) , VOB (DVD format) , PMP,MPEG , .MPG, FLV (H.263 , H.264) , ASF , TS, TP , 3GP , MPG..etc
Support image format	BMP,PNG,GIF,JPEG.
Support audio format	MP3,WMA,MP2,OGG,AAC,M4A,MA4,FLAC,APE,3GP,WAV.
Functions	
Rolling subtitles	Display subtitles at any location of the screen with video or image playing.
Power-off memory	Support replaying from the setting time before power failure
Split screen	Support 1080P video.1080P picture,video,subtitles and web page split screen function
Software update	Remote update /USB updating
Display mode	Support landscape & portrait display
Play mode	Repeat all, single repeat,order play
Supported Infrared sensor to detect body temp	
Software	Build in software to detect temp with voice reading
Type of sensor	Infrared sensor,Thermal imaging (Customized & optional)
Camera	Build USB web camera in the top of the screen(Set aside for face ID)
Other information	
Material	Metal case
Color	White
Mounting way	Wall mount & Free standing optional
Working temp	0°C-50°C
Stocrage temp	-20°C-60°C
Main features	
Support voice reading temp automatically with multi languages	
Build in cloud service for CMS & SW for detecting body temp	
Build in auto sanitizer dispenser sensor	
drip trays design	
Camera optional	
Free standing % wall-mount optional	
With good prices	